

CK3A-series Direct PWM Amplifier

CK3A-G305L/-G310L

CSM CK3A_DS_E_1_2

This servo amplifier provides ultra-low latency servo control by taking signals directly from the controller and flexibility to connect to various motors and encoders.



CK3A-G3□□L

Features

Supported Motors

The CK3A Amplifier, combined with the flexibility of Power PMAC Controller and the ability to interface with various encoder feedback devices, allows the support of the following types of Motors:

- AC/DC synchronous brushless (rotary or linear) - e.g. servo Motor.
- DC Brushed - e.g. voicecoil actuator.
- AC asynchronous - e.g. Induction Motor (contact support for setting up this type of Motor).

Amplifier Features


- Nano-scale linear servo positioning accuracy
- High PWM frequency - up to 20 kHz
- High resolution current sensing - 16-bit ADCs
- High speed current ADC sampling - up to 6.125MHz
- Dual STO inputs and status output
- Basic functions - Energy discharge, dynamic braking, fan control
- Basic Data reporting - DC bus voltage, power module temperature, firmware version
- Dual 7-segment LED status display
- Built-in or external shunt resistor
- Support of low voltage main power operation

CK3A

System Configurations

The CK3A Direct PWM Amplifier connects to the CK3M or UMAC Controller via PWM cable.

- The Motor connects directly to the CK3A Direct PWM Amplifier.
- The encoder connects directly to the Controller.

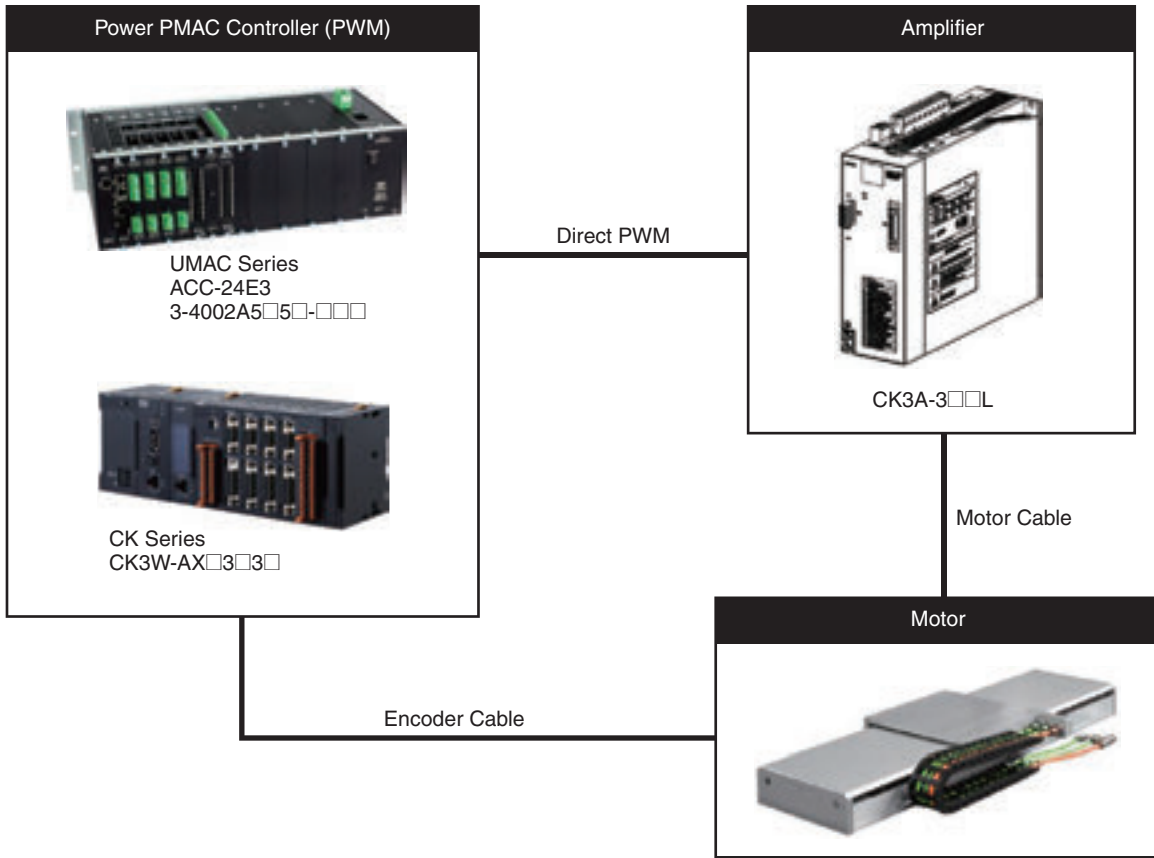

Ordering Information

CK3A series Direct PWM Amplifier

Product name	Main circuit power supply	Rated Current	Model
CK3A series Direct PWM Amplifier	3-Phase AC, 1-Phase AC, 1-Phase DC	5 A _{rms}	CK3A-G305L
	3-Phase AC, 1-Phase AC	10 A _{rms}	CK3A-G310L

Note: The Amplifier comes with the following accessories. Customers are responsible for procuring items other than those listed below.

- Main Power Connector (CN1)
- Control Power Connector (CN2)
- Motor Connector (CN3)
- STO Connector (CN4)

DirectPWM Cable

Product name	Cable length	Model
DirectPWM Cable	0.9 m	CK3W-CAAD009A
	1.8 m	CK3W-CAAD018A
	3.6 m	CK3W-CAAD036A

Note: The amplifier connection side of the CK3W-CAA03A Cable has discrete wires. Wire in accordance with the servo drive specifications.

Refer to Selecting Peripheral Components in the *CK3A-series Direct PWM Amplifier User's Manual (Cat. No. O050)* for details.

CK3A

General/Mechanical

Item		Specification
Number of axes		1
Enclosure		Panel mount
Protective case		IP20 (built into IP54 panel)
Grounding		200 V class D grounding, 100 Ω or less
Vibration resistance		10 to 60 Hz at an acceleration of 5.88 m/s ² or less (Not to be run continuously at the resonant frequency)
Air flow clearance		Refer to installation section
Mounting screws tightening torque		1.2 Nm
Cooling		Natural convection and built-in fan
Weight	CK3A-G305L	1.81 kg
	CK3A-G310L	2.67 kg
Dimensions	CK3A-G305L	212.5 x 65.0 x 180.0 mm
	CK3A-G310L	238.0 x 90.0 x 180.0 mm
Regulations and Standards	Conformance to EU Directives	EMC Directive: EN61800-3 second environment Low Voltage Directive: EN61800-5-1 C2 category Functional Safety: EN61800-5-2 SIL3 (STO)
	Conformance to UL Directives	UL Standards: UL 61800-5-1 CSA Standards: CSA C22.2 No. 274
	Conformance to KC Standards	Applicable

Environmental

Item	Specification
Operating ambient temperature	0 to 55 °C
Operating ambient humidity	10 to 90% RH (without condensation or icing)
Storage ambient temperature	-25 to 70 °C
Storage ambient humidity	10 to 90% RH (without condensation or icing)
Operating and storage atmosphere	Must be free of corrosive gases
Maximum operating altitude	1,000 m

Electrical

Values in parentheses indicate the range of acceptable variation. Rated values are outside of parentheses.

Item		CK3A-G305L	CK3A-G310L	
Logic power supply	Voltage	24 VDC (22.0 to 26.4)		
	Current consumption	1.5 A		
	Inrush current	2.5 A		
	Inrush time	5 msec		
Main circuit power supply	3-Phase AC	Voltage	240 VAC (170 to 252 VAC)	
		F.L.A.	6 A _{rms}	11 A _{rms}
		Frequency	50 / 60 Hz	
	1-Phase AC	Voltage	110 to 240 VAC (85 to 252 VAC)	
		F.L.A.	10.5 A _{rms}	19.5 A _{rms}
		Frequency	50 / 60 Hz	
	1-Phase DC *1	(Low) Voltage	48 VDC *1, 3 (44 to 60 VDC)	
F.L.A.		6 A _{rms}	N/A	
Output	Rated Current	5 A _{RMS}	10 A _{RMS}	
	Maximum (peak) Current	10 A _{RMS}	20 A _{RMS}	
	Maximum Rated Power (3-Phase AC)	1195 W	2390 W	
	Maximum Rated Power (1-Phase 240 VAC)	1195 W	2390 W	
	Maximum Rated Power (1-Phase 110 VAC)	550 W	1095 W	
	Maximum Rated Power (1-Phase DC)	195 W	N/A *2	
	Time at Peak Current	2 sec		
PWM Interface	Current feedback resolution	16 bits		
	Maximum current ADC reading	15.735 A	31.470 A	
	Minimum PWM deadtime	2 µsec	3 µsec	
	PWM Frequency	8 to 20 kHz		
Shunt Resistor	Internal shunt resistor	30 W		
	External shunt resistor	20 Ω, 60 W	17 Ω, 60 W	

*1. Must install low voltage short-circuit wire and set up ADC Strobe Word correctly.

*2. The CK3A-G310L requires a special part number, and factory modification to operate with low voltage main power input. Contact your local Omron representative for this option.

*3. The CK3A (both models) can functionally operate in the 100 to 350 VDC main supply input range without short-circuit wire or special consideration. Operation and setup are same as described in the *CK3A-series Direct PWM Amplifier User's Manual* (Cat. No. O050) however, the specifications and performance are not defined in this case.

CK3A

Performance

Specification	Value	Notes
STO input to power drivers OFF	< 30 msec	
Overcurrent I2T to IPM OFF	< 10 msec	A8 fault
Phase short to IPM OFF	< 3 μ sec	AC fault
Current loop response time	< 1 msec	1 mH 3-Ph brushless Motor Y-winding
Dynamic brake relay response time	< 20 msec	Mechanical relay time constant
I2T time to Amplifier OFF	< 2.5 sec	At 200% output
Soft start time	< 650 msec	Do not enable Amplifier during soft start
Hold at momentary power interruption	10 msec	3-ph 208VAC @ rated load
DC bus discharge to less than < 36 VDC	< 2.5 sec	Forced discharge to shunt resistor
	< 5 min	Natural discharge
Current ADC clock frequency range	2.450 to 6.250 MHz	Set in Controller
Time between main circuit power cycles	1 min minimum	If discharge ON
	10 sec minimum	If discharge OFF

Amplifier Internal Regeneration Absorption Capacity



The following table shows the Amplifier power, internal shunt resistor specifications, regenerative power absorption capacity and maximum duration. These values are based on a 200VAC main power supply.

Model	CK3A-G305L	CK3A-G310L
Rated RMS power [W]	1195 W	2390 W
Internal shunt resistor specification	25 Ω 30 W	17 Ω 80 W
Built-in capacitors absorption energy [J]	46 J	62 J
Internal shunt resistor average regeneration energy [W]	18 W	32 W
Maximum duration of continuous regeneration [sec]	2 sec	2 sec
Minimum allowable shunt resistance [Ω]	20 Ω	15 Ω

Part Names and Functions



Part Names

CK3A-G305L

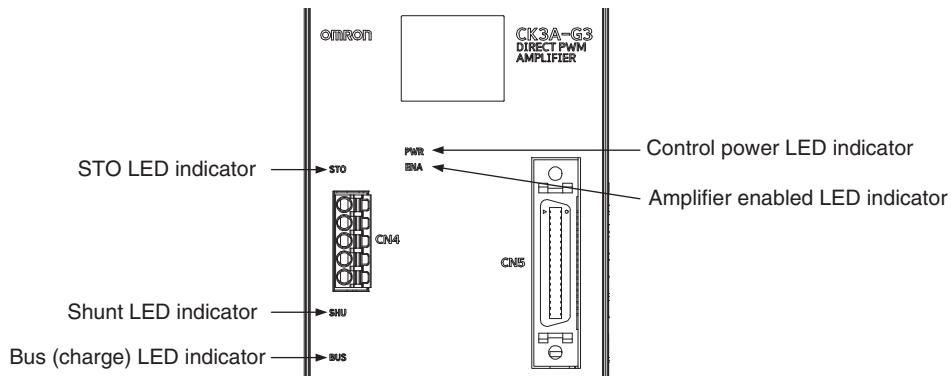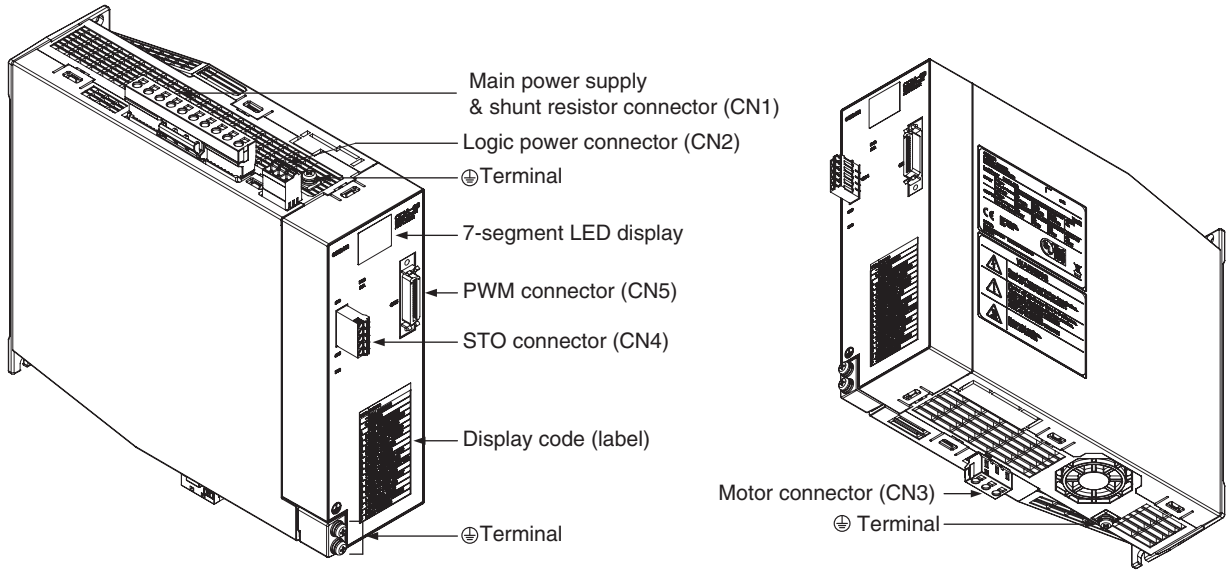

CK3A

CK3A-G310L

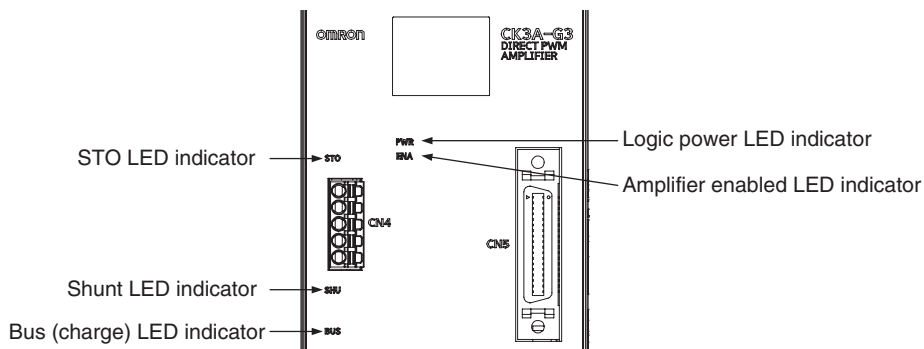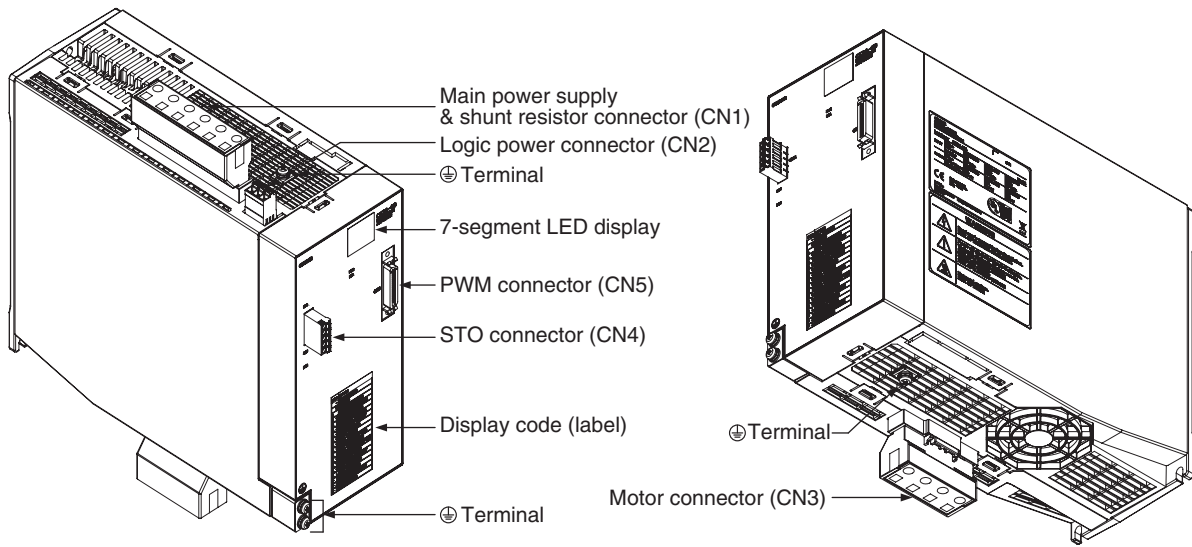

Part Functions

Status LED Indicators

The following LED indicators are located on the front of the Amplifier:

Name	Color	Description
PWR	Green	Indicates the logic power supply status
ENA	Green	Indicates the amplifier enabled status
SHU	Red	Indicates if shunt operation is active
STO	Red/Green	Indicates STO input status
BUS	Red	Indicates bus charge status

Refer to the *CK3A-series Direct PWM Amplifier User's Manual (Cat. No. O050)* for details.

7-segment LED Displays

Dual 7-segment displays are located on the front of the Amplifier. These displays report Amplifier operation and error status. On power-up, the 7-segment displays scroll through all indicators six times.



Main Circuit and Shunt Connector (CN1)

The CN1 connector is used for the following functions:

CK3A-G305L (10-pin)

- Main circuit power supply connection
- Internal shunt resistor connection (by short-circuit wire), or external shunt resistor connection
- Low voltage mode (by short-circuit wire)

CK3A-G310L (6-pin)

- Main circuit power supply connection
- Internal shunt resistor connection (by short-circuit wire), or external shunt resistor connection

Logic Power Supply Connector (CN2)

The CN2 connector (3-pin) is used to supply 24 VDC logic power to the Amplifier.

Motor Connector (CN3)

The CN3 connector is used to connect the Motor to the Amplifier. It is a 3-pin connector for the CK3A-G305L model and 4-pin connector for the CK3A-G310L model.

Safe Torque OFF Connector (CN4)

The CN4 connector (5-pin) is used to disable or connect the STO input(s), and STO status output. The short-circuit wire to disable the STO is installed on the connector from the factory.

Direct PWM Connector (CN5)

The CN5 connector (36-pin) is used to connect the Amplifier to the Controller. This is a pre-configured cable connector.

Ground Terminals

Following, are the location and number of ground (⊕) terminals of the Amplifier:


Location	No. of Terminals	Suggested Use
Top	1	Protective earth PE of main circuit power input
Front	2	Frame Ground FG inside the control panel
Bottom	1	Frame Ground FG of Motor cable and shield

CK3A


Dimensions

(Unit: mm)

CK3A-G305L

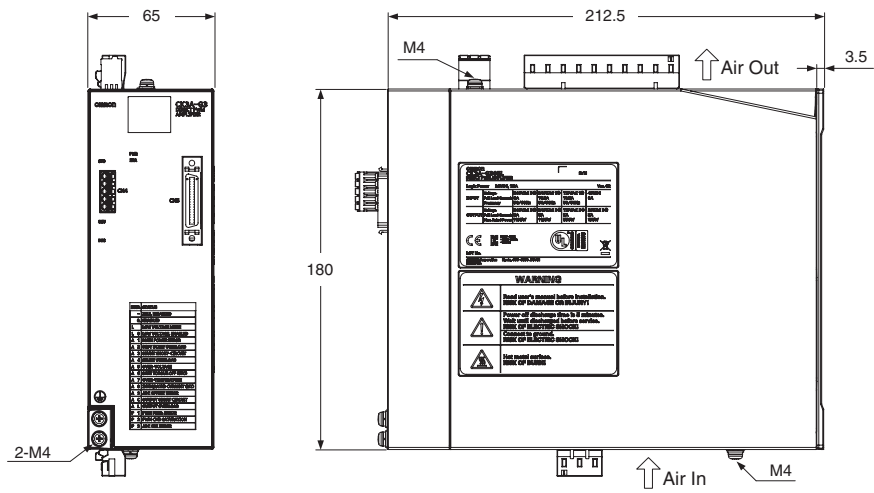


CK3A-G310L

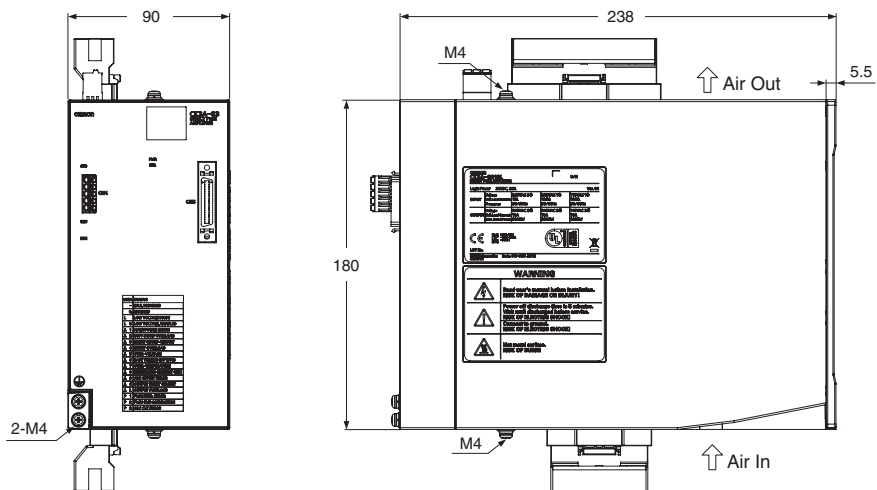


Mounting Dimensions

CK3A-G305L

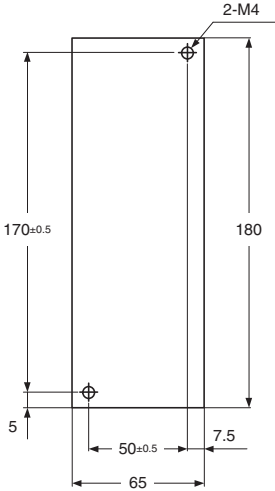

CK3A-G310L

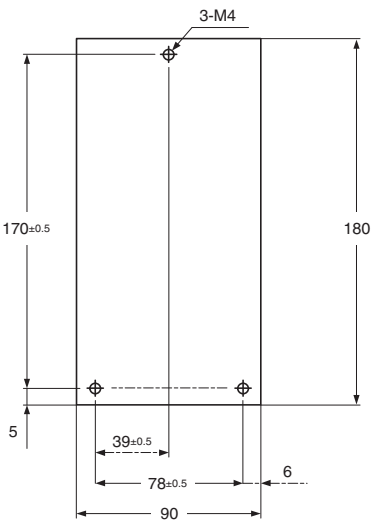

CK3A

Related Manuals

Manual Name	Cat. No.	Application	Description
CK3A-series Direct PWM Amplifier User's Manual	O050	Learning about the specifications, including installation, wiring, basic software configuration, maintenance, and troubleshooting.	<ul style="list-style-type: none">• Introduction to the Amplifier• Configuration, features, and specifications• Mounting, installation and wiring• Basic software configuration• Maintenance, and troubleshooting
CK3M-series Programmable Multi-Axis Controller Hardware User's Manual	O036	Learning the basic specifications of the CK3M, including introductory information, design, installation, and maintenance. Mainly hardware information.	<ul style="list-style-type: none">• Features and system configuration• Introduction• Part names and functions• General specifications• Installation and wiring• Maintenance and inspection
Power PMAC Software Reference Manual	O015	Learning the command set and structure elements of the Power PMAC Controller.	<ul style="list-style-type: none">• Power PMAC Data structure• List and description of all commands• List and description of all ASIC, Coordinate System and Motor structure elements, including CK3M and UMAC
Power PMAC User's Manual	O014	Learning the features and usage examples of the Power PMAC Controller.	<ul style="list-style-type: none">• Parameter settings relevant to the Amplifier• Motor basic functions• Encoder configuration examples• Motor setup examples• Power PMAC programming examples
Power PMAC IDE User Manual	O016	Learning how to use the integrated development environment IDE of the Power PMAC Controller.	<ul style="list-style-type: none">• Operating procedures of the Power PMAC IDE software• Configuration of the Direct PWM Amplifier using system setup
ACC-24E3 Hardware Reference Manual	N/A	Learning the basic specifications of the UMAC accessory ACC-24E3, including introductory information, design, installation, maintenance.	<ul style="list-style-type: none">• Features and system configuration• Introduction• Part names and functions• General specifications• Installation and wiring

Terms and Conditions Agreement

Read and understand this catalog.

Please read and understand this catalog before purchasing the products. Please consult your OMRON representative if you have any questions or comments.

Warranties.

(a) Exclusive Warranty. Omron's exclusive warranty is that the Products will be free from defects in materials and workmanship for a period of twelve months from the date of sale by Omron (or such other period expressed in writing by Omron). Omron disclaims all other warranties, express or implied.

(b) Limitations. OMRON MAKES NO WARRANTY OR REPRESENTATION, EXPRESS OR IMPLIED, ABOUT NON-INFRINGEMENT, MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE OF THE PRODUCTS. BUYER ACKNOWLEDGES THAT IT ALONE HAS DETERMINED THAT THE PRODUCTS WILL SUITABLY MEET THE REQUIREMENTS OF THEIR INTENDED USE.

Omron further disclaims all warranties and responsibility of any type for claims or expenses based on infringement by the Products or otherwise of any intellectual property right. (c) Buyer Remedy. Omron's sole obligation hereunder shall be, at Omron's election, to (i) replace (in the form originally shipped with Buyer responsible for labor charges for removal or replacement thereof) the non-complying Product, (ii) repair the non-complying Product, or (iii) repay or credit Buyer an amount equal to the purchase price of the non-complying Product; provided that in no event shall Omron be responsible for warranty, repair, indemnity or any other claims or expenses regarding the Products unless Omron's analysis confirms that the Products were properly handled, stored, installed and maintained and not subject to contamination, abuse, misuse or inappropriate modification. Return of any Products by Buyer must be approved in writing by Omron before shipment. Omron Companies shall not be liable for the suitability or unsuitability or the results from the use of Products in combination with any electrical or electronic components, circuits, system assemblies or any other materials or substances or environments. Any advice, recommendations or information given orally or in writing, are not to be construed as an amendment or addition to the above warranty.

See <http://www.omron.com/global/> or contact your Omron representative for published information.

Limitation on Liability: Etc.

OMRON COMPANIES SHALL NOT BE LIABLE FOR SPECIAL, INDIRECT, INCIDENTAL, OR CONSEQUENTIAL DAMAGES, LOSS OF PROFITS OR PRODUCTION OR COMMERCIAL LOSS IN ANY WAY CONNECTED WITH THE PRODUCTS, WHETHER SUCH CLAIM IS BASED IN CONTRACT, WARRANTY, NEGLIGENCE OR STRICT LIABILITY.

Further, in no event shall liability of Omron Companies exceed the individual price of the Product on which liability is asserted.

Suitability of Use.

Omron Companies shall not be responsible for conformity with any standards, codes or regulations which apply to the combination of the Product in the Buyer's application or use of the Product. At Buyer's request, Omron will provide applicable third party certification documents identifying ratings and limitations of use which apply to the Product. This information by itself is not sufficient for a complete determination of the suitability of the Product in combination with the end product, machine, system, or other application or use. Buyer shall be solely responsible for determining appropriateness of the particular Product with respect to Buyer's application, product or system. Buyer shall take application responsibility in all cases.

NEVER USE THE PRODUCT FOR AN APPLICATION INVOLVING SERIOUS RISK TO LIFE OR PROPERTY OR IN LARGE QUANTITIES WITHOUT ENSURING THAT THE SYSTEM AS A WHOLE HAS BEEN DESIGNED TO ADDRESS THE RISKS, AND THAT THE OMRON PRODUCT(S) IS PROPERLY RATED AND INSTALLED FOR THE INTENDED USE WITHIN THE OVERALL EQUIPMENT OR SYSTEM.

Programmable Products.

Omron Companies shall not be responsible for the user's programming of a programmable Product, or any consequence thereof.

Performance Data.

Data presented in Omron Company websites, catalogs and other materials is provided as a guide for the user in determining suitability and does not constitute a warranty. It may represent the result of Omron's test conditions, and the user must correlate it to actual application requirements. Actual performance is subject to the Omron's Warranty and Limitations of Liability.

Change in Specifications.

Product specifications and accessories may be changed at any time based on improvements and other reasons. It is our practice to change part numbers when published ratings or features are changed, or when significant construction changes are made. However, some specifications of the Product may be changed without any notice. When in doubt, special part numbers may be assigned to fix or establish key specifications for your application. Please consult with your Omron's representative at any time to confirm actual specifications of purchased Product.

Errors and Omissions.

Information presented by Omron Companies has been checked and is believed to be accurate; however, no responsibility is assumed for clerical, typographical or proofreading errors or omissions.